



11g Wireless USB Adapter



WNC-0305USB

H/W Version: 1

Product Overview


The LevelOne WNC-0305USB is a wireless USB dongle adapter for delivering high-speed wireless connectivity and is fully compliant with IEEE 802.11g and is backward compatible to 802.11b.

Easy Installation

The device supports UPnP standard, you can easily and quickly install the adapter into any desktop or notebook with installation wizard and the hot-swappable USB 2.0/1.1/1.0 interface.

Advanced Security Encryption

The WNC-0305USB provides 64/128 WEP, WPA/ WPA2 security features to protect your data transmission between wireless router and computer. With the compact and portable design, the device makes it an easy fit for any limited space.

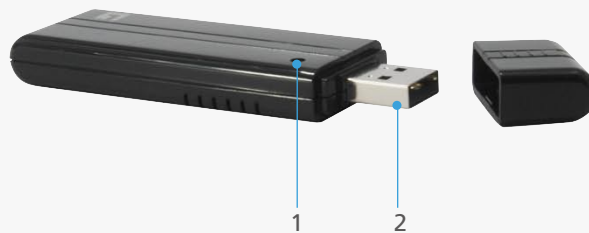

1. Power/Link LED
2. USB Port

Key Features

- Enjoy high-speed Wireless connectivity through your USB port
- Easy Plug-and-Play setup with installation wizard
- Complies with IEEE 802.11b/g standards for 54Mbps Wireless connectivity
- Advanced Wireless security protection with 64/128-bit WEP, WPA/WPA2
- Supports USB 2.0/1.1/1.0 interface
- Portable and mini-size design
- Comes bundled with WSK-1000 and WSK-2000 Wireless starter kits
- Supports Windows 2000/XP/Vista (driver)

Works Well With



WAP-3100
11g Wireless PoE AP




WBR-3408
54Mbps Wireless Router w/ QoS

Technical Specification

Standards
IEEE 802.11g, IEEE 802.11b
Host Interface
USB Port Type: USB 2.0, 1.1, 1.0
Radio Operation
Data Transfer Rate
802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps
802.11b: 11, 5.5, 2 and 1 Mbps
Modulation
802.11g: OFDM
802.11b: CCK, QPSK, BPSK
Media Access Control
CSMA/CA with ACK
Frequency Band
2.4GHz ~ 2.4835GHz
Number of Channels
Channel 1~11 North America
Channel 1~13 Europe, Japan
Transmitter Output Power (Typical)
802.11g: 14 ± 2dBm
802.11b: 16 ± 2dBm

Network Security
- WEP-64/128 bit
- WPA
- WPA-PSK
- WPA2
- WPA2-PSK
-TKIP, AES with 802.1x
Device Management
Windows Utility Software
OS Supported: Windows 2000/XP/Vista 32bit (driver)/
Vista 64bit (driver)
Physical Specifications
LED
Power/Link
Temperature
Operating: 0°C ~ 40°C
Humidity
0% ~ 90% (non-condensing)
Dimensions
87mm(D) x 29mm(W) x 9mm(H)
Certifications
CE,FCC

Product Diagram

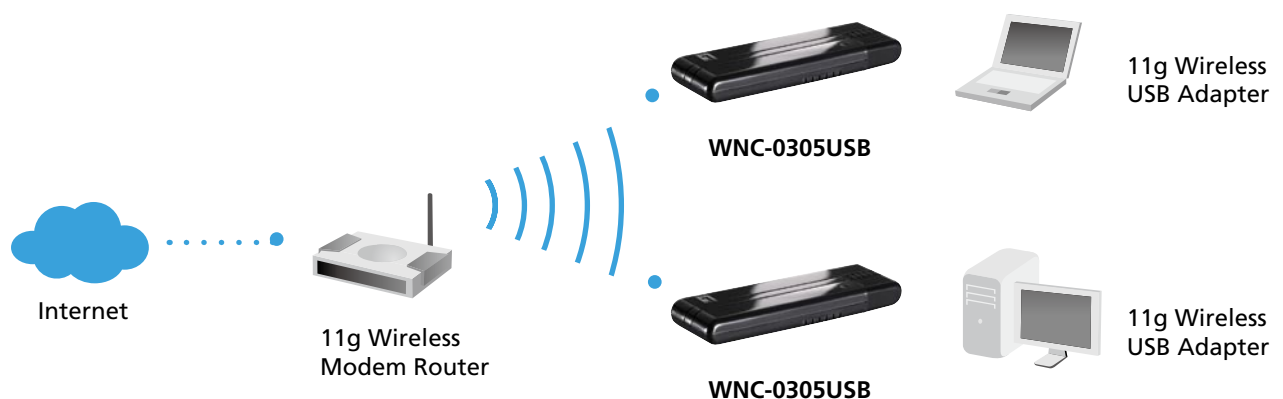

Order Information

WNC-0305USB : 11g Wireless USB Adapter

Package Contents

WNC-0305USB
Quick Installation Guide
CD Manual/Driver/Utility

Option Accessories



SUS-1000
Small USB Stand



SUS-1003
Small USB Stand
with extension cable